

# X40133S1

40kW Charging Modules

## APPLICATIONS





- ✓ Wallbox Chargers
- ✓ Stand Alone Chargers
- ✓ Group Charging Systems
- ✓ Swapping Stations

## PRODUCT INTRODUCTION

**X40133S1** The smart AC/DC charging module is designed for high power EV charging equipment, applied the world's latest power electronic control topology, with good performance and power density, achieves high efficiency, wide output voltage range to meet today and future EV charging requirement, wide operation temperature range makes it can be applied in hot weather, thorough gel filled technology ensures higher protection.

## KEY FEATURES

- ✓ Gel filled ensures stronger environmental suitability
- ✓ Dynamic protection algorithm provides better protection strategy and higher reliability
- ✓ 3 phase without neutral eliminates the risk of high neutral currents
- ✓ Built-in voltage discharge circuit
- ✓ Zero standby power consumption(external control)

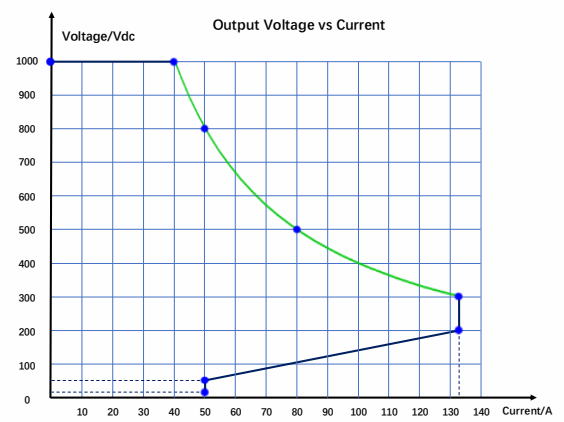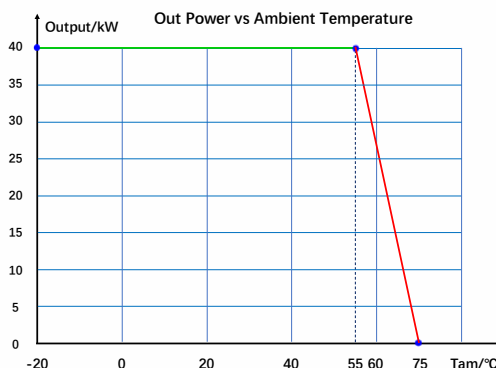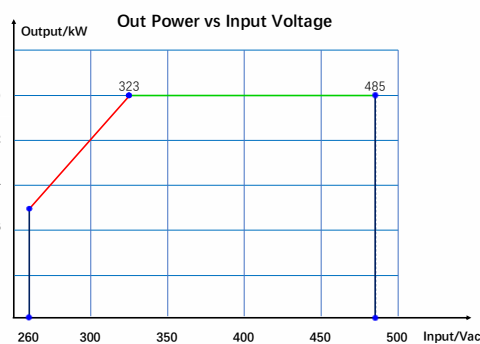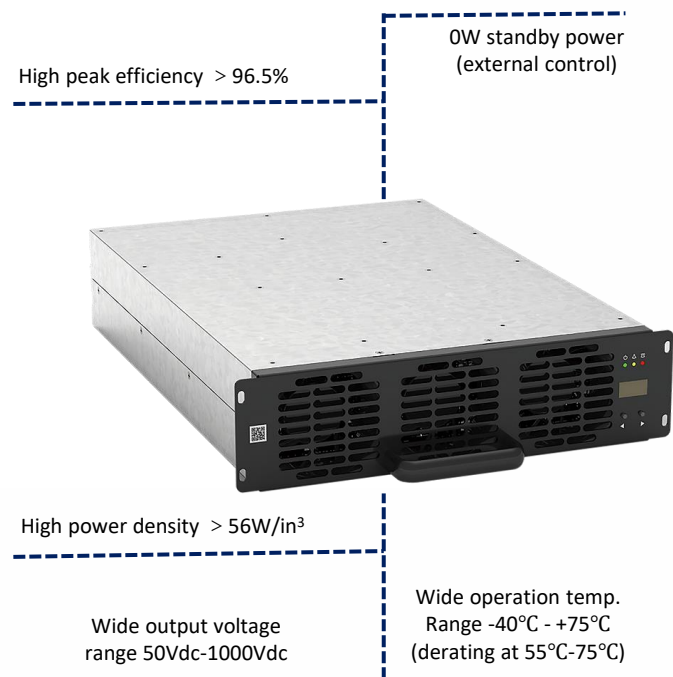

# X40133S1 SPECIFICATIONS

Input	Voltage Range	260-485Vac
	Current Range	0-80A
	Wiring	Three Phase, 3W+PE
	Frequency	50/60Hz +/- 5Hz
	THDi	3% max under Nominal Power
	Power Factor	0.99 min at Full Load
	Standby Power	0W with external control
Output	Voltage Range	50-1000Vdc
	Nominal Power	40kW at 300-1000Vdc
	Max Current	133A
	Short Circuit Protection	Current limit when in output short circuit, auto recovery
	Voltage Regulation	Within +/- 0.5%
	Current Regulation	Within +/- 1%
Communication & Alarm	Communication	CAN
	Parallel Installation	60 Modules max.
	Module Address	Support software setting and hardware setting
Environment	Operation Temp.	-40°C~+75°C (derating from 55°C to 75°C)
	Storage Temp.	-40°C~+85°C
	Relative Humidity	Under 98% RH, non-condensing
	Altitude	Under 2000m with nominal power
General Spec.	Dimension	300*437*84(W*D*H, mm, w/o handle)
	Weight	Under 20kg
	IP Protection	IP20
	Cooling	Force Air
	Noise	Under 65dB at full load @ 25°C
	Package	1pcs/carton; 28pcs/pallet or customized

## Xi'an XYPower Technology Co., Ltd.

South Floor 1, Building 2, Huatian Telecommunication Park,  
No. 38 Tuanjie South Road, Xi'an High-tech Zone,  
Xi'an City, Shaanxi Province, China - 710000

Email: [info@xypower.com](mailto:info@xypower.com) Tel: +86 029 8132 8191

Fax: +86 029 8132 8191

**Disclaimer:** The specifications of this catalog is for reference only; the performance of the products may vary from different application scenarios and environment. Product specification is subject to change without prior notice.